


Waste Plastic Recycling and Granulation Machines

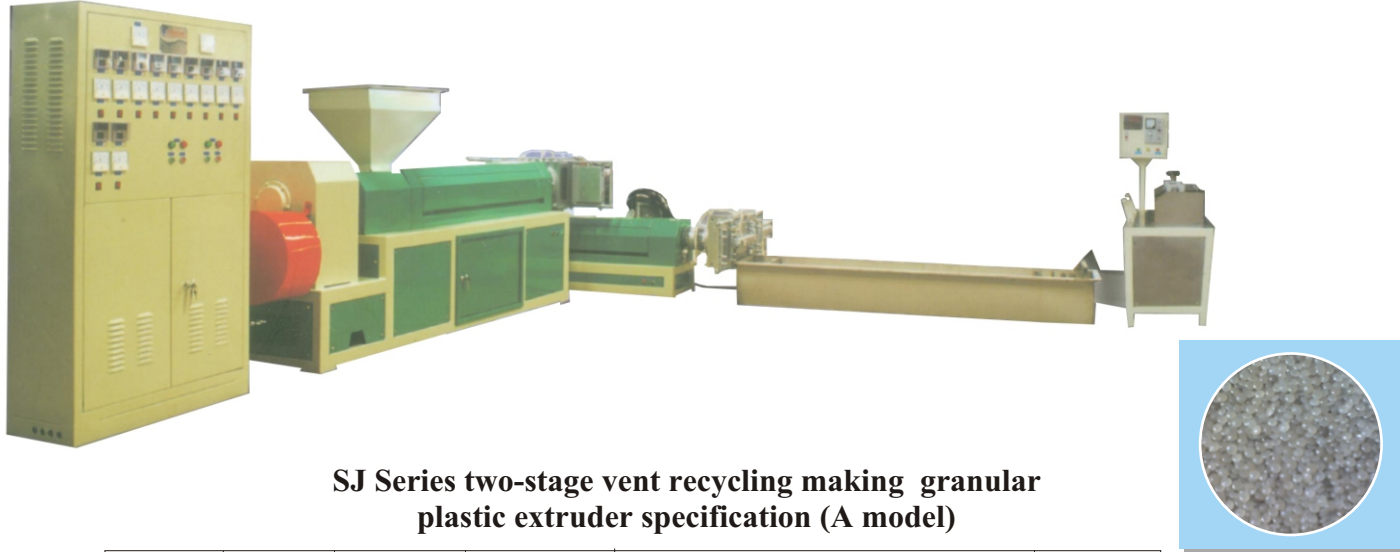

SJ Series two-stage vent recycling making granular plastic extruder specification (A model)

Model	Screw Dia. (Mm)	Screw length (mm)	Vented style	Motor power (kW)	Heat Zone	Heat power (kW)	Output (kg/h)
SJ-120A	120	2400	Single Vent	37-4	5	28	80-200
SJ-130A	130	2400		37-4	5	30	120-250
SJ-130A	130	2600		45-4	6	35	120-250
SJ-140A	140	2400		45-4	6	40	150-300
SJ-140A	140	2600		55-4	7	45	150-300

Notice: 430 Gear Box, Single Electric Panel, 3kw Timing 21 Knives Roller Pelletizer, 2.5m Stainless, Steel Water Tank.

SJ-120A The Second Stage

SJ-140A	140	3600	Single Vent	55-6	9	65	180-375
SJ-150A	150	3000		75-4	8	60	200-375
SJ-160A	160	3000		75-4	8	65	230-400

Notice: 550 Gear Box, Single Electric Panel, 4kw Timing 30 Knives Roller Pelletizer, 3m Stainless, Steel Water Tank.

SJ-140A The Second Stage

Notice: The First stage: 38CrMoAIA Material Screw, Nitrogen Harden, 40Cr Material Barrel, Nitrogen Harden .(The Second Stage) (320 Gear Box)

Model	Screw Dia. (Mm)	Screw length (mm)	Vented style	Motor power (kW)	Heat Zone	Heat power (kW)
SJ-120A	120	1600	Single Vent	15-4	3	12
SJ-140A	140	1800		18.5-4	4	18

Also Available :

- The single stage water pelletizer for round plastic pellets.
- Two stage Twin Screw pelletizer line for high quality colour pellets.